


DP 4015
DECO WALL LAMP
INSTALLATION GUIDE

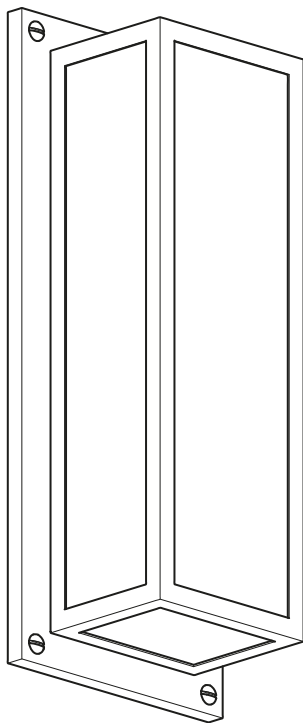

LEFROY BROOKS

IMPORTANT INFORMATION

1 Switch off your power supply at the fuse box (consumer unit). This can be achieved in two ways. The first is to turn off the miniature circuit breaker (MCB) for the lighting circuit and place RED insulating tape over the MCB to prevent it being accidentally turned on. The second is to turn off the main switch, remove the circuit fuse and turn the main switch on again to restore power to the rest of the house.

2 Colour code for fixed wiring:

GREEN & YELLOW – Earth



BROWN – Live

(Live wires can also be RED)



BLUE – Neutral


(Neutral wires can also be BLACK)





BLUE with brown sleeve – Switch wire with sleeve




NOTE: Some lamps may have a clear cable. In this case, the earth wire will be marked with a green & yellow thread.

3 CLASS I Lamps (Earthed) – Connect the brown wire from the lamp to the supply live wire (red or brown). Connect the blue wire to the supply neutral wire (black or blue). Connect the green & yellow wire to the supply earth wire (green & yellow) or connect the supply earth to the lamp earth terminal marked with the symbol 




4 CLASS II Lamps (Not earthed) – These lamps are double insulated and have the symbol . These fittings do not have to be connected to the supply earth. Make sure that the basic insulation of the supply wiring cannot contact touchable metal. Connect the brown wire from the lamp to the supply live wire (red or brown). Connect the blue wire to the supply neutral wire (black or blue). Isolate the supply earth wire.




Silicone sleeving may be fitted to protect the supply cable from heat. Fit the sleeving over the supply cable up to the terminal block or lamp holder or to at least the mounting surface.

DIMENSIONS

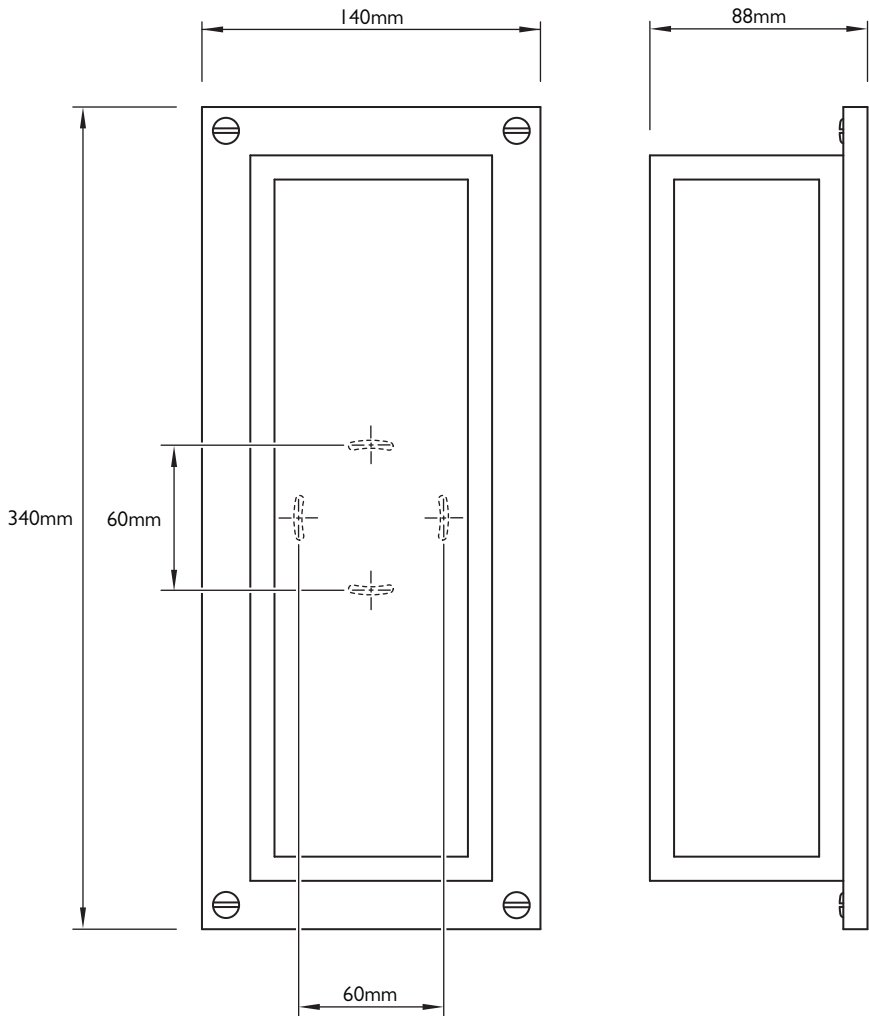


INSTALLATION

- 1 Connect the supply cable and earth cable to the mains supply within the wall cavity.
- 2 Place the body of the lamp against a suitable mounting surface. Using a spirit level, ensure that the body is level. Mark the location of the two slotted holes on the mounting surface. Drill two suitable holes for the required fixings. Wall plugs and screws are supplied with the lamp. Secure the mounting plate using suitable fixings.

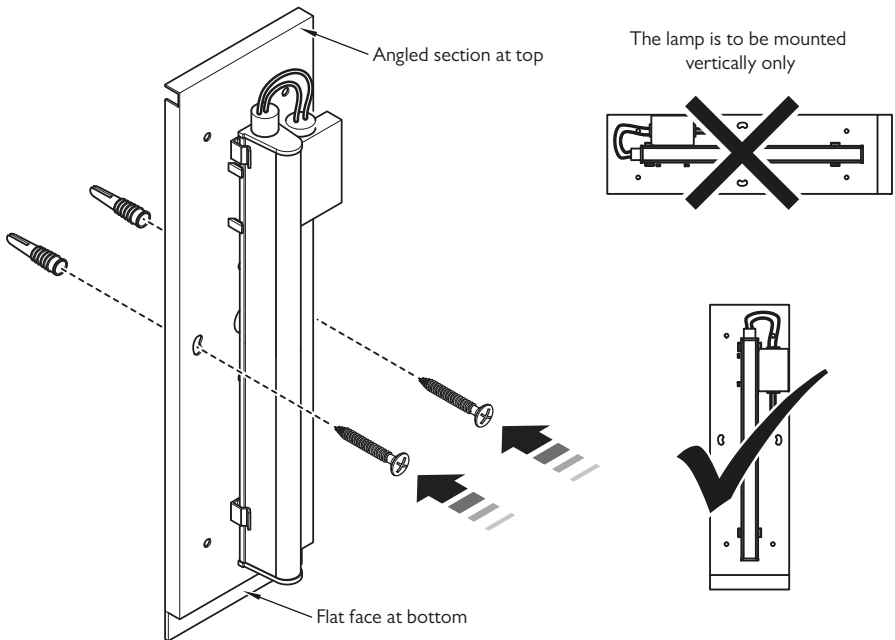

INSTALLATION

- 3 Tilt the shade so the bottom is furthest away from the body (A).
- 4 There is a hook on the upper rear of the shade. Offer the shade onto the body so that the hook locates to the rear of the body (B).
- 5 With the hook located over the back of the lamp body, allow the bottom of the shade to swing into place. Magnets at the bottom of the shade will secure the shade to the body.


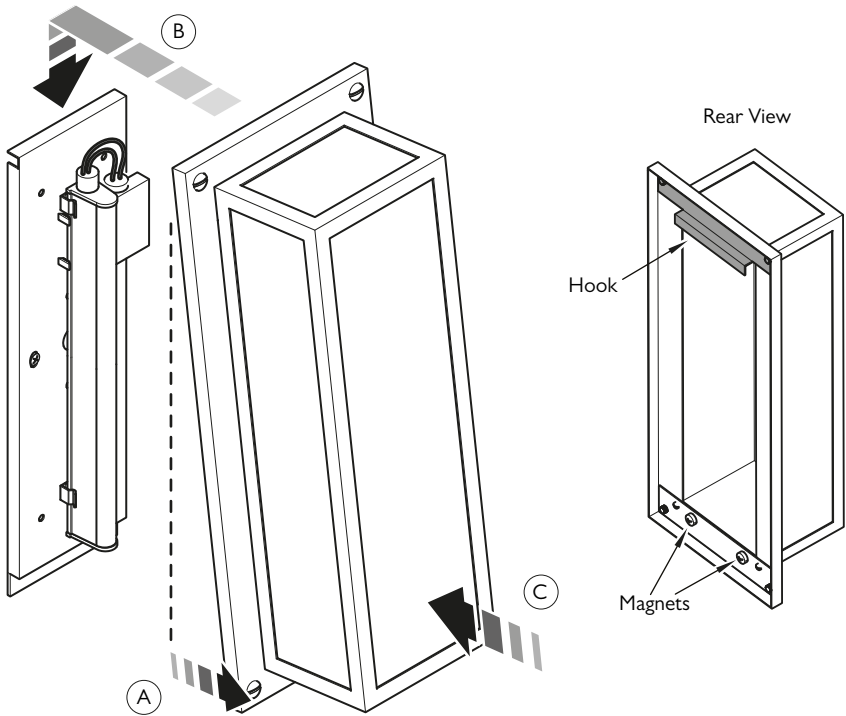


SERVICING

Replacing the LED assembly

- 1 Switch off your power supply at the fuse box (consumer unit). This can be achieved in two ways. The first is to turn off the miniature circuit breaker (MCB) for the lighting circuit and place RED insulating tape over the MCB to prevent it being accidentally turned on. The second is to turn off the main switch, remove the circuit fuse and turn the main switch on again to restore power to the rest of the house.
- 2 For safety reasons the LED bulb is not available to purchase on its own and must be bought as part of an assembly. The assembly is the body of the lamp. The part number for this assembly is PLT008.
- 3 Gently pull the bottom of the shade. This will release the magnets that hold the shade to the lamp body.
- 4 Lift the shade clear of the lamp body.
- 5 Remove the two screws that secure the lamp body to the mounting surface.
- 6 Disconnect the lamp from the supply cable within the cavity.
- 7 Fit the replacement lamp body and shade as shown in this guide.

SERVICING

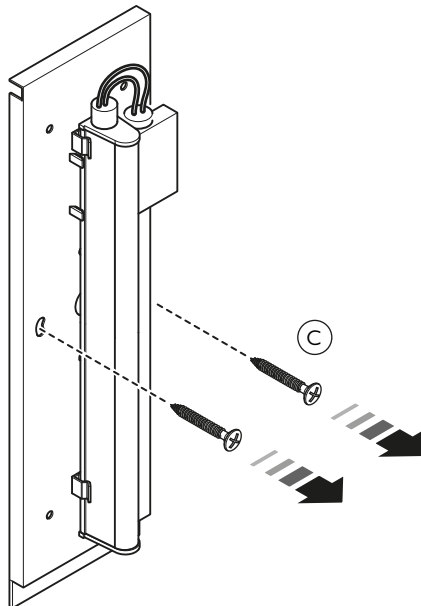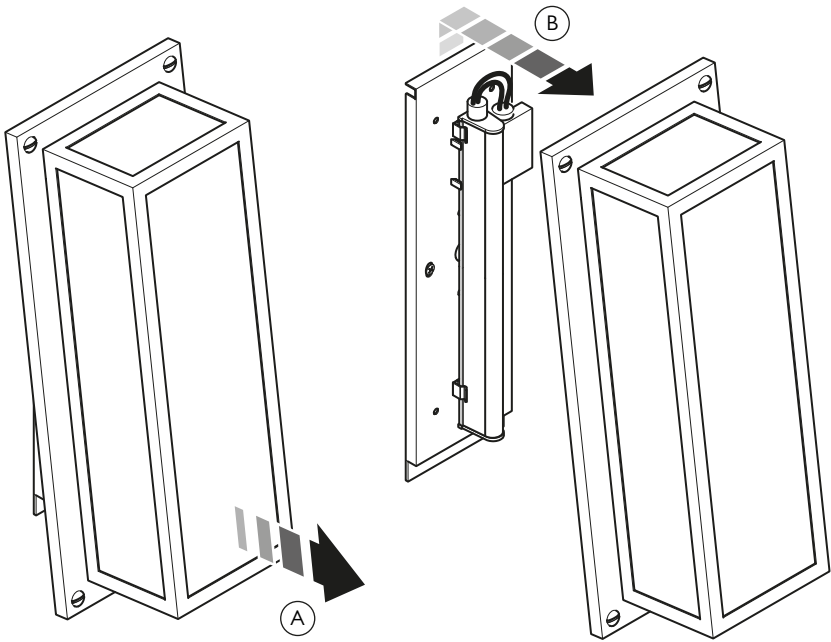



CUSTOMER SERVICE DIRECT LINE

+44 (0)1902 390 894

customerservices@lefroymrooks.co.uk

LEFROYBROOKS.CO.UK

Whilst every effort is made to ensure the accuracy of these, they are subject to change without notice as part of the company's product development process. The use of trademarks, product design and artwork is subject to licence or agreement with LBIP Ltd. The design registrations, trademark registrations and copyrights are protected by law and the use or reproduction outside the terms of an agreement is prohibited. The right to modify designs and dimensions is reserved. LBIP Ltd is a member of ACID (Anti Copying in Design). E&OE