


BA 3003 CONCEALED 3 WAY DIVERTER THERMOSTATIC SHOWER VALVE

FLOW RATES

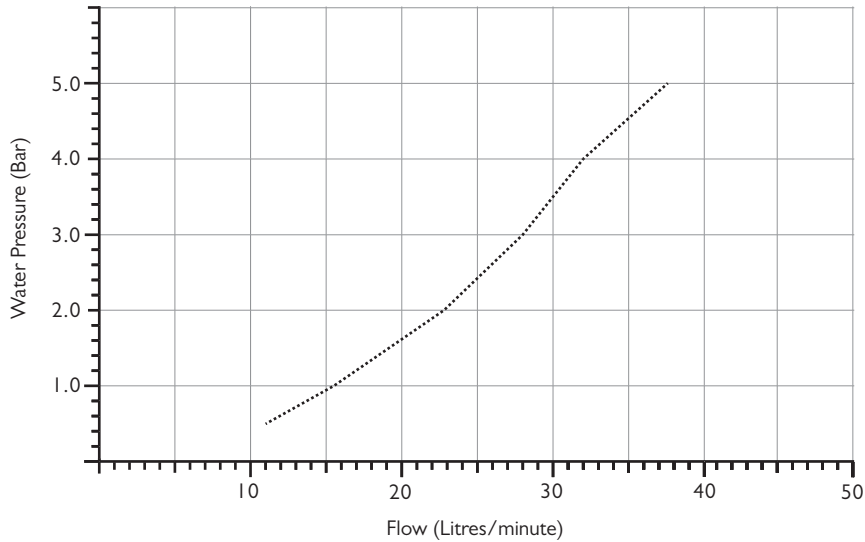

TYPICAL FLOW RATES

Flow rates shown are free flowing and may vary subject to restrictions created by installation, pipework layout or application.

Water Pressure (Bar)	Outlet (Litres/minute)
0.5	10.5
1.0	15.6
2.0	22.7
3.0	27.8
4.0	31.9
5.0	37.4



COALBROOK